

Philips V Line 272V8LA/00 PC lamekuvar 68,6 cm (27") 1920 x 1080 pikslit Full HD LED Must

Brand : Philips

Product family: V Line

Product code: 272V8LA/00

Product name : 272V8LA/00

272V8LA LCD monitor

Philips V Line 272V8LA/00 PC lamekuvar 68,6 cm (27") 1920 x 1080 pikslit Full HD LED Must:


Philips V line wide-view monitor gives viewing beyond boundaries, great value with essential features. Adaptive-Sync delivers smooth video display. Features like anti-glare, LowBlue mode and flicker-free for easy-on-the-eyes.

Philips V Line 272V8LA/00. Ekraani diagonaal: 68,6 cm (27"), Ekraani resolutsioon: 1920 x 1080 pikslit, HD tüüp: Full HD, Ekraani tehnoloogia: LED, Ekraani pind: Matt, Reaktsiooniaeg: 4 ms, Loomulik kuvasuhe: 16:9, Vaatenurk, horisontaalne: 178°, Vaatenurk, vertikaalne: 178°. Sisesehitatud kõlar(id). VESA paigaldamine. Toote värv: Must



Display		Ergonomics	
Display diagonal *	68.6 cm (27")	Cable lock slot *	✓
Display resolution *	1920 x 1080 pixels	Cable lock slot type	Kensington
HD type *	Full HD	Height adjustment *	✗
Native aspect ratio *	16:9	Tilt angle range	-5 - 20°
Display technology *	LED	On Screen Display (OSD)	✓
Panel type *	VA	On Screen Display (OSD) languages	Simplified Chinese, Traditional Chinese, Czech, German, Dutch, English, Spanish, Finnish, French, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Swedish, Turkish, Ukrainian
Backlight type	W-LED	Number of OSD languages	21
Touchscreen *	✗	Plug and Play	✓
Display brightness (typical)	250 cd/m ²	LED indicators	Operation, Stand-by
Response time *	4 ms	Power	
Display surface	Matt	Energy efficiency class (SDR) *	E
Anti-glare screen	✓	Energy consumption (SDR) per 1000 hours *	21 kWh
Screen shape *	Flat	Power consumption (typical) *	24.5 W
Aspect ratio	16:9	Power consumption (standby) *	0.5 W
Contrast ratio (typical) *	3000:1	Power consumption (off)	0.3 W
Dynamic contrast ratio marketing name	Mega Infinity DCR	AC input voltage	100 - 240 V
Maximum refresh rate *	75 Hz	AC input frequency	50 - 60 Hz
Viewing angle, horizontal	178°	Power supply type	Internal
Viewing angle, vertical	178°	Energy efficiency scale	A to G
Display number of colours *	16.7 million colours	European Product Registry for Energy Labelling (EPREL) code	419757
Pixel pitch	0.3114 x 0.3114 mm	Operational conditions	
Pixel density	82 ppi	Operating temperature (T-T)	0 - 40 °C
Horizontal scan range	30 - 85 kHz	Storage temperature (T-T)	-20 - 60 °C
Vertical scan range	48 - 75 Hz	Operating relative humidity (H-H)	20 - 80%
Viewable size, horizontal	59.8 cm		
Viewable size, vertical	33.6 cm		
Digital horizontal frequency	30 - 85 kHz		
Digital vertical frequency	48 - 75 Hz		
Display diagonal (metric)	68.6 cm		
DDC/CI	✓		

Display		Operational conditions	
Haze rate	25%	Operating altitude	0 - 3658 m
Surface hardness	3H	Non-operating altitude	0 - 12192 m
Colour gamut standard	sRGB	Weight & dimensions	
Display sRGB	✓	Width (with stand)	613 mm
Performance		Depth (with stand)	231 mm
NVIDIA G-SYNC *	✗	Height (with stand)	456 mm
AMD FreeSync *	✗	Weight (with stand)	4 kg
VESA Adaptive Sync support	✓	Width (without stand)	613 mm
Component video sync	Separate sync, Sync-on-green (SOG)	Depth (without stand)	45 mm
Flicker-free technology	✓	Height (without stand)	363 mm
Low Blue Light technology	✓	Weight (without stand)	3.54 kg
Multimedia		Packaging data	
Number of speakers	2	Package width	730 mm
RMS rated power	2 W	Package depth	123 mm
Built-in speaker(s) *	✓	Package height	446 mm
Built-in camera *	✗	Package weight	5.66 kg
Design		Packaging content	
Market positioning *	Home	Stand included	✓
Product colour *	Black	Cables included	HDMI, AC
Feet colour	Black	Quick start guide	✓
Ports & interfaces		Manual	✓
Built-in USB hub *	✗	Other features	
VGA (D-Sub) ports quantity	1	Exterior finish type	Textured
DVI port	✗	Picture enhancement	SmartImage
HDMI *	✓	Recyclable packaging material	100%
HDMI ports quantity	1	Regulatory Approvals	UKRAINIAN; CB; TUV Ergo; TUV/GS; EAEU RoHS; CU-EAC; CE Mark
DisplayPorts quantity	1	Heavy metals free	Hg (mercury)
Audio input	✓	EasyRead mode	✓
Headphone out *	✓	LowBlue mode	✓
PC Audio in	✓	Compliance certificates	RoHS
HDCP	✓	Mean time between failures (MTBF)	50000 h
Ergonomics		Certification	UKRAINIAN, CB, TUV Ergo, TUV/GS, EAEU RoHS, CU-EAC, CE Mark
VESA mounting *	✓	Logistics data	
Panel mounting interface	100 x 100 mm	Harmonized System (HS) code	85285210

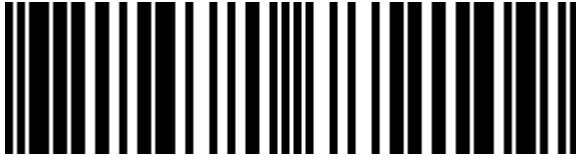

8712581772109

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 18-FEB-2025. Prints or copies of Information are only valid on the printed Publication date