

ZYXEL


Zyxel WAC500H 1200 Mbit/s Valge Power over Ethernet tugi

Brand : Zyxel

Product code: WAC500H-EU0101F


Product name : WAC500H

Zyxel WAC500H. 2,4 GHz, 5 GHz, Andmete edastamise maksimaalne määr: 1200 Mbit/s. Turvaalgoritmid: EAP, SNMP, WEP, WPA, WPA2-Enterprise, WPA2-PSK, WPA3. Ethernet LAN-i andmeedastuskiirused: 10,100,1000 Mbit/s. Power over Ethernet tugi. Toote värv: Valge



Funktsioonid		Võimsus	
2,4 GHz *	✓	AC-sisendsagedus	50 - 60 Hz
5 GHz *	✓	Sisendvool	0.3 A
Andmete edastamise maksimaalne määr *	1200 Mbit/s	Väljundpinge	12 V
Maksimaalne andmeedastuskiirus (2.4 GHz)	300 Mbit/s	Väljundvool	1 A
Maksimaalne andmeedastuskiirus (5 GHz)	866 Mbit/s	Disain	
Ethernet LAN-i andmeedastuskiirused	10,100,1000 Mbit/s	Paigutus *	Sein
Võrgustandardid	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11k, IEEE 802.11n, IEEE 802.11r, IEEE 802.11v, IEEE 802.1x, IEEE 802.3af, IEEE 802.3at	Toote värv *	Valge
		Sertifikaat	FCC 15C, FCC 15E; ETSI EN 300 328, EN 301 893; LP0002, EN 60601-1-2 FCC 15B, EN 301 489-1; EN 301 489-17, EN55022, EN55024, EN61000-3-2/-3, BSMI CNS13438 EN 60950-1, IEC 60950-1; BSMI CNS14336-1
Kanali ribalaius	80 MHz	Antenn	
MIMO	✓	Antenni tüüp *	Sisemodem
MIMO tüüp	Multi User MIMO	Antennivõimenduse tase (maksimaalne)	4 dBi
Wi-Fi multimeedia (WMM)/(WME)	✓	Kaal ja mõõtmed	
Kiire roaming	✓	Laius	173 mm
VLAN-i tugi	✓	Sügavus	97 mm
Juhtmevaba isolatsioon	✓	Kõrgus	29 mm
Band Steering	✓	Kaal	223 g
Jõuülekanne	26 dBmW	Pakendi andmed	
Vastuvõtja tundlikkus	-99 dBm	Pakendi laius	195 mm
Turvalisus		Pakendi sügavus	120 mm
Turvaalgoritmid *	EAP, SNMP, WEP, WPA, WPA2-Enterprise, WPA2-PSK, WPA3	Pakendi kõrgus	53 mm
MAC-aadresside filtreerimine	✓	Pakendi kaal	444 g
Automaatne juhtmevaba jaotussüsteem (WDS)	✓	Pakendi sisu	
Juhtimisfunktsioonid		Kaasnevate toodete arv	1 tk
Veebipõhine haldus	✓	Paigalduskomplekt	✓
Käsurealiides (CLI)	✓		

Pesad & liidesed		Töötingimused	
Ethernet LAN (RJ-45) pordid *	3	Suhteline õhuniiskus kasutamisel (H-H)	10 - 90 protsenti
DC-pistik	✓	Kasutamistemperatuur (T-T)	0 - 50 °C
Võimsus		Hoiustamistemperatuur (T-T)	-30 - 70 °C
Power over Ethernet tugi *	✓	Suhteline õhuniiskus (H-H) hoiustamisel	10 - 90 protsenti
AC-sisendpinge	100 - 240 V	Logistika andmed	
		Harmonized System (HS) kood	85176990

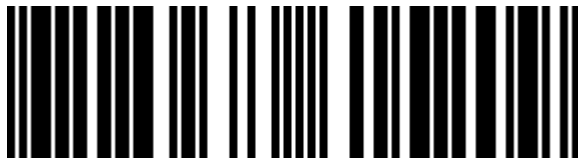

4718937615209



4172937615209

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-AUG-2024. Prints or copies of Information are only valid on the printed Publication date