

## TP-Link TL-SG1210MPE võrgulüliti Juhitav L2 Gigabit Ethernet (10/100/1000) Power over Ethernet tugi Must

**Brand :** TP-Link

**Product code:** TL-SG1210MPE

**Product name :** TL-SG1210MPE



TP-Link TL-SG1210MPE. Lüliti tüüp: Juhitav, Lüliti kiht: L2. RJ-45 Etherneti ühenduse pesade tüüp: Gigabit Ethernet (10/100/1000), RJ-45 Etherneti ühenduse pesade arv: 9. MAC-aadresside tabel: 4000 sisestust, Lülitusvõime: 20 Gbit/s. Võrgustandardid: IEEE 802.1Q, IEEE 802.1p, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3i, IEEE 802.3u, IEEE.... Alalisvoolu sisendpinge: 53.5 V. Toitepistik: Alaldi sisendi pesa. Power over Ethernet tugi




Juhtimisfunktsioonid		Disain	
Lüliti tüüp *	Juhitav	Püstikmontaaž *	✗
Lüliti kiht	L2	Toote värv	Must
Teenusekvaliteedi (QoS) tugi	✓	LED-indikaatorid	✓
Pesad & liidesed		Võimsus	
RJ-45 Etherneti ühenduse pesade arv *	9	Kaasas toiteplokk *	✓
RJ-45 Etherneti ühenduse pesade tüüp *	Gigabit Ethernet (10/100/1000)	Alalisvoolu sisendpinge	53.5 V
Kiudjuhtme portide arv	1	Sisendvool	2.43 A
Fiiberoptiline pistmik	SFP	Internet elektrivõrgu kaudu (PoE)	
Toitepistik	Alaldi sisendi pesa	Power over Ethernet tugi *	✓
Võrgustumine		Toide üle võrgu (PoE) pesade arv	8
Võrgustandardid *	IEEE 802.1Q, IEEE 802.1p, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z	Toide üle võrgu (PoE) võimsus pordi kohta	30 W
10G-tugi *	✗	Töötingimused	
Pordipeegeldus	✓	Kasutamistemperatuur (T-T)	0 - 40 °C
Levindamise torni kontroll	✓	Hoiustamistemperatuur (T-T)	-40 - 70 °C
Kiiruse piiramine	✓	Suhteline õhuniiskus kasutamisel (H-H)	10 - 90 protsenti
Andmeedastus		Suhteline õhuniiskus (H-H) hoiustamisel	5 - 95 protsenti
Lülitusvõime *	20 Gbit/s	Kaal ja mõõtmed	
Edastamise kiirus	14,88 Mpps	Laius	209 mm
MAC-aadresside tabel *	4000 sisestust	Sügavus	126 mm
Ladusta-ja-edasta	✓	Kõrgus	26 mm
Hiigelkaadrite tugi	✓	Pakendi andmed	
Hiigelkaadrite	16000	Juhend	✓
Turvalisus		Logistika andmed	
IGMP-jälgimine	✓	Harmonized System (HS) kood	85176990
Tsükli kaitse	✓		



6935364052676



6935364052669

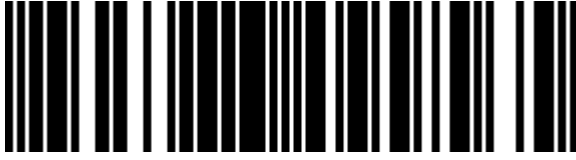

0845973099565



845973099565

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.