



TP-Link TL-SG1210MP võrgulüliti Mittejuhitav Gigabit Ethernet (10/100/1000) Power over Ethernet tugi Must

Brand : TP-Link

Product code: TL-SG1210MP

Product name : TL-SG1210MP



TP-Link TL-SG1210MP. Lüliti tüüp: Mittejuhitav. RJ-45 Etherneti ühenduse pesade tüüp: Gigabit Ethernet (10/100/1000), RJ-45 Etherneti ühenduse pesade arv: 9. MAC-aadresside tabel: 4000 sisestust, Lülitusvõime: 20 Gbit/s. Võrgustandardid: IEEE 802.3af, IEEE 802.3at, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z. Power over Ethernet tugi




Management features		Power	
Switch type *	Unmanaged	Input current	2.43 A
Ports & interfaces		Input voltage	53.5 V
Basic switching RJ-45 Ethernet ports quantity *	9	Power consumption (max)	141.4 W
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Power over Ethernet (PoE)	
Combo SFP ports quantity	1	Power over Ethernet (PoE) *	✓
Network		Power over Ethernet plus (PoE+) ports quantity	8
Networking standards *	IEEE 802.3af, IEEE 802.3at, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z	Power over Ethernet (PoE) power per port	30 W
10G support *	✗	Total Power over Ethernet (PoE) budget	123 W
Copper ethernet cabling technology	10BASE-T, 100BASE-TX	Operational conditions	
Cable types supported	Cat3, Cat4, Cat5, Cat5e	Operating temperature (T-T)	0 - 40 °C
Flow control support	✓	Storage temperature (T-T)	-40 - 70 °C
Auto MDI/MDI-X	✓	Operating relative humidity (H-H)	10 - 90%
Auto-negotiation	✓	Storage relative humidity (H-H)	5 - 90%
MAC address auto-learning supported	✓	Heat dissipation	482.17 BTU/h
MAC address auto-aging supported	✓	Weight & dimensions	
Data transmission		Width	209 mm
Switching capacity *	20 Gbit/s	Depth	126 mm
MAC address table *	4000 entries	Height	26 mm
Store-and-forward	✓	Packaging content	
Packet buffer memory	14.88 MB	Quick start guide	✓
Design		Packaging data	
Rack mounting *	✗	Package width	240 mm
		Package depth	315 mm
		Package height	70 mm


Design		Packaging data	
Product colour	Black	Package weight	1.41 kg
LED indicators	✓	Certificates	
Performance		Certification	CE, FCC
Fanless	✓	Logistics data	
Power		Harmonized System (HS) code	85176990
Power source *	DC		



6935364052683

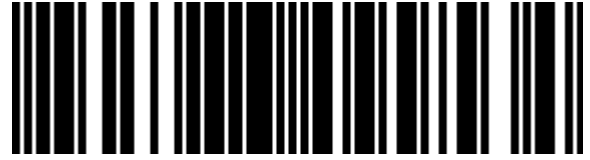

0845973099534



845973099534



6935364052690

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.