



Dahua Technology PoE DH-PFS4226-24ET-360-V3 võrgulüliti Juhitav L2 Gigabit Ethernet (10/100/1000) Power over Ethernet tugi Must

Brand : Dahua Technology

Product family: PoE


Product code: DH-
PFS4226-24ET-360-V3



Product name : DH-
PFS4226-24ET-360-V3

Dahua Technology PoE DH-PFS4226-24ET-360-V3. Lüliti tüüp: Juhitav, Lüliti kiht: L2. RJ-45 Etherneti ühenduse pesade tüüp: Gigabit Ethernet (10/100/1000), RJ-45 Etherneti ühenduse pesade arv: 26. MAC-aadresside tabel: 4000 sisestust, Lülitusvõime: 8,8 Gbit/s. Võrgustandardid: IEEE 802.3, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z. Power over Ethernet tugi. Püstikmontaaž

Juhtimisfunktsioonid		Multisaate tunnused	
Lüliti tüüp *	Juhitav	Multiedastuse tugi	✓
Lüliti kiht	L2	Disain	
Teenusekvaliteedi (QoS) tugi	✓	Püstikmontaaž *	✓
Pesad & liidesed		Toote värv	Must
RJ-45 Etherneti ühenduse pesade arv *	26	Korpuse materjal	Metall
RJ-45 Etherneti ühenduse pesade tüüp *	Gigabit Ethernet (10/100/1000)	Võimsus	
Kiire Etherneti (vask) pesade arv	24	Toiteallikas *	Vahelduvvool
Gigabitise Etherneti (vask) portide arv	2	Kaasas toiteplokk *	✓
SFP mooduli pesade arv	2	AC-sisendpinge	100 - 240 V
Võrgustumine		Internet elektrivõrgu kaudu (PoE)	
Võrgustandardid *	IEEE 802.3, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z	Power over Ethernet tugi *	✓
10G-tugi *	✗	Toide üle võrgu (PoE) võimsus pordi kohta	90 W
Voo reguleerimise tugi	✓	Toide üle võrgu (PoE) võimsusühikuid kokku	360 W
Linkide koondamine	✓	Töötingimused	
Genereeriva puu protokoll	✓	Kasutamistemperatuur (T-T)	-5 - 55 °C
VLAN-i tugi	✓	Suhteline õhuniiskus kasutamisel (H-H)	10 - 90 protsenti
Andmeedastus		Kaal ja mõõtmed	
Lülitusvõime *	8,8 Gbit/s	Laius	300 mm
Edastamise kiirus	6,55 Mpps	Sügavus	440 mm
MAC-aadresside tabel *	4000 sisestust	Kõrgus	44 mm
Turvalisus		Pakendi andmed	
DHCP elemendid	DHCP client	Pakendi laius	412 mm
		Pakendi sügavus	527 mm
		Pakendi kõrgus	110 mm

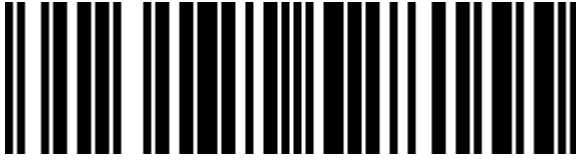

6923172528155

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 20-AUG-2024. Prints or copies of Information are only valid on the printed Publication date