

ASUS ZenWiFi AX (XT9) AX7800 2er Set Schwarz Kolm sagedusala (2,4 GHz / 5 GHz / 5 GHz) Wi-Fi 6 (802.11ax) Must 4 Sisemodem

Brand : ASUS


Product code: 90IG0740-MO3B30

Product name : ZenWiFi AX (XT9) AX7800 2er Set Schwarz



ASUS ZenWiFi AX (XT9) AX7800 2er Set Schwarz. Toote värv: Must, Antenni tüüp: Sisemodem, Toote tüüp: Võrgusüsteem. Wi-Fi laineala: Kolm sagedusala (2,4 GHz / 5 GHz / 5 GHz), Wi-Fi standard: Wi-Fi 6 (802.11ax), WiFi-standardid: 802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax). Protsessori sagedus: 1,7 GHz, Sisemälu: 512 MB, Välmälu: 256 MB. AC-adapteri sisendpinge: 110 - 240 V, AC-adapteri sagedus: 50 - 60 Hz, AC-adapteri väljundpinge: 12 V. Kaal: 740 g

Disain		Juhtmevaba LAN-i omadused	
Toote tüüp	Võrgusüsteem		Instant Guard VPN Client L2TP VPN Client OVPN VPN Client PPTP VPN Client WireGuard VPN Server IPsec VPN Server OVPN VPN Server PPTP VPN Fusion VPN Server WireGuard
Toote värv *	Must	VPN-tugi	
LED-indikaatorid	Võimsus		
Antenni tüüp *	Sisemodem		
Antennide arv	6		
Maksimaalne katvus	264,77 m ²		
Lähtestusnupp	✓		
Juhtmevaba LAN-i omadused		Funktsioonid	
Wi-Fi laineala *	Kolm sagedusala (2,4 GHz / 5 GHz / 5 GHz)	Sisesehitatud protsessor	✓
Wi-Fi standard *	Wi-Fi 6 (802.11ax)	Protsessorituumad	2
WiFi-standardid	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax)	Protsessori sagedus	1,7 GHz
WLAN edastuskiirus (esimene laineala)	574 Mbit/s	Sisemälu	512 MB
WLAN edastuskiirus (teine laineala)	2402 Mbit/s	Välmälu	256 MB
WLAN andmeedastuskiirus (kolmas laineala)	4804 Mbit/s	Teenusekvaliteedi (QoS) tugi	✓
Võrgustandardid	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11g, IEEE 802.11n	Vanemlik kontroll	✓
Turvaalgoritmid	WPA-Enterprise, WPA-PSK, WPA2-Enterprise, WPA2-PSK, WPA3-PSK, WPS	Vanemliku kontrolli funktsioonid	Kohandatud profiilid
IGMP-jälgimine	✓	Tarkvara uuendatav läbi	Automaatne uuenduste viisard
Dünaamiline DNS (DDNS)	✓	Töörežiimid	Wireless router mode, Access point mode
Külalise juurdepääs	✓	Pesad & liidesed	
		Ethernet LAN (RJ-45) pordid *	4
		Ethernet WAN	✓
		Võimsus	
		AC-adapteri sisendpinge	110 - 240 V
		AC-adapteri sagedus	50 - 60 Hz
		AC-adapteri väljundpinge	12 V
		AC-adapteri väljundvool	3 A
		Kaal ja mõõtmed	
		Kaal	740 g
		Pakendi sisu	
		AC-adapter kaasa arvatud	✓
		Ethernet-kaabel	✓

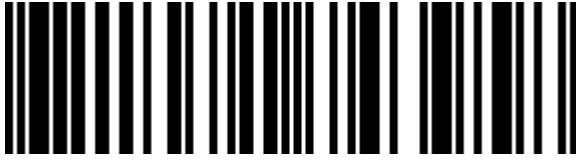

4711081743958

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-AUG-2024. Prints or copies of Information are only valid on the printed Publication date