

ZYXEL

Zyxel XMG1915-10EP Juhitav L2 2.5G Ethernet (100/1000/2500) Power over Ethernet tugi




Brand : Zyxel

Product code: XMG1915-10EP-EU0101F

Product name : XMG1915-10EP

Zyxel XMG1915-10EP. Lüliti tüüp: Juhitav, Lüliti kiht: L2. RJ-45 Etherneti ühenduse pesade tüüp: 2.5G Ethernet (100/1000/2500), RJ-45 Etherneti ühenduse pesade arv: 8. MAC-aadresside tabel: 16000 sisestust, Lülitusvõime: 80 Gbit/s. Võrgustandardid: IEEE 802.1p, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3at, IEEE 802.3az, IEEE 802.3bt, IEEE 802.3bz,.... Power over Ethernet tugi. Püstikmontaaž

Juhtimisfunktsioonid		Disain	
Lüliti tüüp *	Juhitav	LED-indikaatorid	✓
Lüliti kiht	L2	Toimimine	
Teenusekvaliteedi (QoS) tugi	✓	Sisemälu	256 MB
Pesad & liidesed		Välkmälu	32 MB
RJ-45 Etherneti ühenduse pesade arv *	8	Ülendatav püsivara	✓
RJ-45 Etherneti ühenduse pesade tüüp *	2.5G Ethernet (100/1000/2500)	Keskmine tõrkeintervall (MTBF)	394,499 h
SFP+ mooduli pesade arv	2	Võimsus	
Võrgustumine		Toiteallikas *	AC/PoE
Võrgustandardid *	IEEE 802.1p, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3at, IEEE 802.3az, IEEE 802.3bt, IEEE 802.3bz, IEEE 802.3x, IEEE 802.3z	Kaasas toiteplokk *	✓
		AC-sisendpinge	100 - 240 V
		AC-sisendsagedus	50/60 Hz
10G-tugi *	✓	Elektritarbimine (max)	150 W
VLAN-i tugi	✓	Internet elektrivõrgu kaudu (PoE)	
Virtuaalse LANi elemendid	MAC address-based VLAN, Port-based VLAN, Voice VLAN	Power over Ethernet tugi *	✓
Andmeedastus		Toide üle võrgu (PoE) pesade arv	8
Lülitusvõime *	80 Gbit/s	Toide üle võrgu (PoE) võimsusühikuid kokku	130 W
Edastamise kiirus	59,5 Mpps	Töötingimused	
MAC-aadresside tabel *	16000 sisestust	Kasutamistemperatuur (T-T)	0 - 40 °C
Hiielkaadrite tugi	✓	Hoiustamistemperatuur (T-T)	-40 - 70 °C
Hiielkaadrite	12000	Suhteline õhuniiskus kasutamisel (H-H)	5 - 95 protsenti
Paketi puhvermälu	1,5 MB	Suhteline õhuniiskus (H-H) hoiustamisel	5 - 95 protsenti
Turvalisus		Kaal ja mõõtmed	
DHCP elemendid	DHCP client, DHCP relay, DHCP snooping	Laius	250 mm
IGMP-jälgimine	✓	Sügavus	104 mm
Turvaalgoritmid	SNMP, SNMPv2, SNMPv3	Kõrgus	27 mm
MAC-aadresside filtreerimine	✓	Kaal	780 g
SSH/SSL tugi	✓	Pakendi andmed	
Autentimise tüüp	RADIUS	Kaablid kaasa arvatud	Vahelduvvool
Multisaate tunnused			
Multiedastuse tugi	✓		
Multiedastuse elemendid	Multisaate edastamine		
Disain			
Püstikmontaaž *	✓		

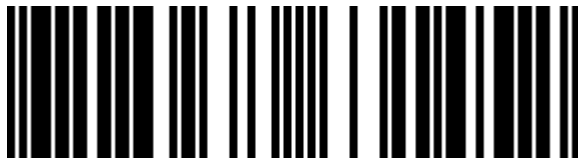

4718937631452

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-AUG-2024. Prints or copies of Information are only valid on the printed Publication date