



TP-Link TL-SG1006PP võrgulüliti Mittejuhitav Gigabit Ethernet (10/100/1000) Power over Ethernet tugi Hall



Brand : TP-Link

Product code: TL-SG1006PP


Product name : TL-SG1006PP

TP-Link TL-SG1006PP. Lüliti tüüp: Mittejuhitav. RJ-45 Etherneti ühenduse pesade tüüp: Gigabit Ethernet (10/100/1000), RJ-45 Etherneti ühenduse pesade arv: 6. MAC-aadresside tabel: 4000 sisestust, Lülitusvõime: 12 Gbit/s. Võrgustandardid: IEEE 802.1p, IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x. Alalisvoolu sisendpinge: 53.5 V. Power over Ethernet tugi. Püstikmontaaž

Juhtimisfunktsioonid		Disain	
Lüliti tüüp *	Mittejuhitav	Toote värv	Hall
Teenusekvaliteedi (QoS) tugi	✓	LED-indikaatorid	✓
Pesad & liidesed		Sertifikaat	FCC, CE, RoHS
RJ-45 Etherneti ühenduse pesade arv *	6	Toimimine	
RJ-45 Etherneti ühenduse pesade tüüp *	Gigabit Ethernet (10/100/1000)	Ilma ventilaatorita	✓
Võrgustumine		Võimsus	
Võrgustandardid *	IEEE 802.1p, IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x	Toiteallikas *	DC/PoE
10G-tugi *	✗	Kaasas toiteplokk *	✓
Etherneti vaskaablite tehnoloogia	10BASE-T, 100BASE-TX, 1000BASE-T	Alalisvoolu sisendpinge	53.5 V
Toetatud kaablitüübid	Cat3, Cat4, Cat5, Cat5e, Cat6	Sisendvool	1.31 A
Voo reguleerimise tugi	✓	Võimsustarve (tüüpiline)	4,75 W
Auto MDI/MDI-X	✓	Elektritarbimine (max)	71,46 W
Ethernet LAN-i andmeedastuskiirused	10,100,1000 Mbit/s	Internet elektrivõrgu kaudu (PoE)	
Automaatne ühildumine	✓	Power over Ethernet tugi *	✓
Automaatse MAC-aadressi tuvastamise tugi	✓	Toide üle võrgu (PoE) pesade arv	4
Automaatse MAC-aadressi aegumise tugi	✓	Toide üle võrgu (PoE) võimsusühikuid kokku	64 W
Andmeedastus		Töötingimused	
Lülitusvõime *	12 Gbit/s	Kasutamistemperatuur (T-T)	0 - 40 °C
Edastamise kiirus	8,928 Mpps	Hoiustamistemperatuur (T-T)	-40 - 70 °C
MAC-aadresside tabel *	4000 sisestust	Suhteline õhuniiskus kasutamisel (H-H)	10 - 90 protsenti
Ladusta-ja-edasta	✓	Suhteline õhuniiskus (H-H) hoiustamisel	5 - 90 protsenti
Turvalisus		Soojuse hajumine	16,2 BTU/h
IGMP-jälgimine	✓	Kaal ja mõõtmed	
Disain		Laius	158 mm
Püstikmontaaž *	✓	Sügavus	101 mm
Virnastatav *	✓	Kõrgus	25 mm
		Pakendi andmed	
		Kiirstardi juhend	✓
		Pakendi tüüp	Karp



4895252500332

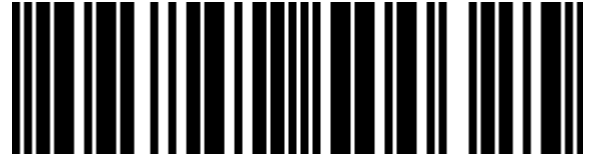

4895252500325

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-AUG-2024. Prints or copies of Information are only valid on the printed Publication date