

Axagon RVC-HI2M videokabliadapter 0,25 m USB tüüp-C HDMI Must

Brand : Axagon

Product code: RVC-HI2M

Product name : RVC-HI2M

Axagon RVC-HI2M. Kaabli pikkus: 0,25 m, Pistmik 1: USB tüüp-C, Pistmik 2: HDMI. Kaal: 23 g, Laius: 65 mm, Sügavus: 22 mm. Kogus pakis: 1 tk, Pakendi laius: 170 mm, Pakendi sügavus: 90 mm



Features		Features		
Connector 1 form factor	Straight	Windows operating systems supported	✓	
Connector 2 form factor	Straight	Mac operating systems supported	✓	
Cable length *	0.25 m	High Dynamic Range (HDR) technology	High Dynamic Range 10 (HDR10)	
Connector 1 *	USB Type-C	Other operating systems supported	Android, ChromeOS	
Connector 2 *	HDMI	Certification	CE	
Connector 1 gender *	Male	Weight & dimensions		
Connector 2 gender *	Female	Weight	23 g	
HDMI version	2.1a	Width	65 mm	
USB Type-C DisplayPort Alternate Mode	✓	Depth	22 mm	
High Dynamic Range (HDR) supported	✓	Height	10 mm	
Maximum resolution	4096 x 2160 pixels	Packaging data		
Supported graphics resolutions	800 x 600 (SVGA), 1024 x 768 (XGA), 1152 x 864 (XGA+), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 768, 1280 x 768 (WXGA), 1280 x 800, 1280 x 800 (WXGA), 1280 x 960, 1360 x 768 (WXGA), 1366 x 768, 1400 x 1050 (SXGA+), 1440 x 900 (WXGA+), 1440 x 900, 1600 x 1200 (UXGA), 1600 x 900, 1920 x 1080 (HD 1080), 1920 x 1200 (WUXGA), 2048 x 1152, 2048 x 1536 (QXGA), 2560 x 1080, 2560 x 1440, 2560 x 1600 (WQXGA), 2560 x 1920, 2560 x 2048, 3840 x 1200, 3840 x 2160, 4096 x 2160	Quantity per pack	1 pc(s)	
	800 x 600 (SVGA), 1024 x 768 (XGA), 1152 x 864 (XGA+), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 768, 1280 x 768 (WXGA), 1280 x 800, 1280 x 800 (WXGA), 1280 x 960, 1360 x 768 (WXGA), 1366 x 768, 1400 x 1050 (SXGA+), 1440 x 900 (WXGA+), 1440 x 900, 1600 x 1200 (UXGA), 1600 x 900, 1920 x 1080 (HD 1080), 1920 x 1200 (WUXGA), 2048 x 1152, 2048 x 1536 (QXGA), 2560 x 1080, 2560 x 1440, 2560 x 1600 (WQXGA), 2560 x 1920, 2560 x 2048, 3840 x 1200, 3840 x 2160, 4096 x 2160	Package width	170 mm	
	600p, 720p, 800p, 900p, 960p, 1024p, 1080p, 1280p, 1440p, 1600p, 2160p	Package depth	90 mm	
		Package height	30 mm	
		Package type	Box	
		Package weight	53 g	
		Manual	✓	
		Technical details		
	Refresh rate at maximum resolution	60 Hz	Compliance certificates	RoHS
	Product colour	Black		
Cable type	Round cable			


Features

Plug and Play



Country of origin

China

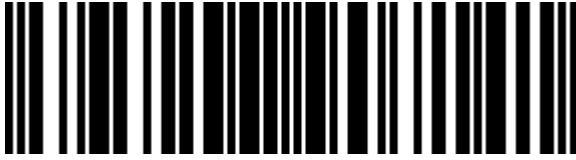

8595247907141

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 17-DEC-2024. Prints or copies of Information are only valid on the printed Publication date