

Axagon RVH-VGAN videokaabliadapter 0,15 m HDMI tüüp A (Standard) VGA (D-Sub) Must

Brand : Axagon

Product code: RVH-VGAN

Product name : RVH-VGAN

Axagon RVH-VGAN. Kaabli pikkus: 0,15 m, Pistmik 1: HDMI tüüp A (Standard), Pistmik 2: VGA (D-Sub). Kaal: 31 g, Laius: 15 mm, Sügavus: 45 mm. Kogus pakis: 1 tk, Pakendi laius: 25 mm, Pakendi sügavus: 90 mm



| Features | | Features | |
|------------------------------------|---|---------------------------------|--|
| Connector 1 form factor | Straight | | |
| Connector 2 form factor | Straight | | |
| Audio connector | ✓ | | |
| Audio connector type | 3.5 mm (1/8") | | |
| Cable length * | 0.15 m | | |
| Connector 1 * | HDMI Type A (Standard) | Mac operating systems supported | Mac OS 8.0, Mac OS 8.1, Mac OS 8.5, Mac OS 8.6, Mac OS 9.0, Mac OS 9.1, Mac OS 9.2, Mac OS X 10.0 Cheetah, Mac OS X 10.1 Puma, Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 10.2 Jaguar, Mac OS X 10.3 Panther, Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks, macOS |
| Connector 2 * | VGA (D-Sub) | | |
| Connector 1 gender * | Male | | |
| Connector 2 gender * | Female | | |
| HDMI version | 1.4b | | |
| HDCP | ✓ | | |
| HDCP version | 1.4 | | |
| Maximum resolution | 1900 x 1200 pixels | | |
| Supported graphics resolutions | 640 x 480 (VGA), 800 x 600 (SVGA), 1024 x 768 (XGA), 1152 x 864 (XGA+), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 768 (WXGA), 1280 x 800 (WXGA), 1280 x 960, 1360 x 768 (WXGA), 1366 x 768, 1366 x 768, 1400 x 1050 (SXGA+), 1440 x 900 (WXGA+), 1600 x 1200 (UXGA), 1600 x 900, 1680 x 1050 (WSXGA+), 1920 x 1080 (HD 1080), 1920 x 1200 (WUXGA) | | |
| Refresh rate at maximum resolution | 60 Hz | | |
| Product colour | Black | | |
| Plug and Play | ✓ | | |
| Converter type | Active video converter | | |
| Country of origin | China | | |


| Features | | Features | |
|-------------------------------------|--|-----------------------------------|---|
| Windows operating systems supported | Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 2000, Windows 2000 Professional, Windows 3.x, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows 95, Windows 98, Windows 98SE, Windows CE, Windows ME, Windows RT, Windows RT 8.1, Windows Vista, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows Vista x64, Windows XP, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64 | Linux operating systems supported | CentOS 5.1, CentOS 5.2, CentOS 5.8, CentOS 6.2, CentOS 7.0, Debian 5.0, Debian 5.0.1, Debian 5.0.2, Debian 5.0.3, Debian 6.0, Debian 7.0, Debian 8.0, Fedora 10, Fedora 11, Fedora 12, Fedora 13, Fedora 14, Fedora 15, Fedora 16, Fedora 17, Fedora 18, Fedora 21, Fedora 22, Fedora 23, Fedora 24, Fedora 25, Fedora 26, Fedora 27, Fedora 6, Fedora 7, Fedora 8, Fedora 9, FreeBSD 6.3, FreeBSD 7.0, Kernel 2.6.31, Linpus Linux 9.6, Linpus Lite 2.1, Linux Mint 10, Linux Mint 11, Linux Mint 12, Linux Mint 13, Linux Mint 17, Linux Mint 17.1, Linux Mint 17.2, Linux Mint 18.1, Linux Mint 18.3, Linux Mint Debian Edition 2 (LMDE 2), Oracle Linux 5.8, Oracle Linux 6.2, Oracle Linux 7.0, PCLinuxOS 2011, PCLinuxOS 2014.12, Red Flag Desktop 6.0, Red Hat Enterprise Linux WS 4.0, Red Hat Enterprise Linux WS 5.0, Red Hat Enterprise Linux WS 6.0, Red Hat Enterprise Linux WS 7.0, RedHat EL Linux, RedHat EL Linux 3 U9, RedHat EL Linux 4.0, RedHat EL Linux 4.0 U5, RedHat EL Linux 4.0 U6, RedHat EL Linux 4.0 U7, RedHat EL Linux 5.0, RedHat EL Linux 5.1, RedHat EL Linux 5.2, RedHat EL Linux 5.3, RedHat EL Linux 5.6, RedHat EL Linux 6.0, RedHat EL Linux 7.0, SUSE Linux Enterprise Desktop 10, SUSE Linux Enterprise Desktop 11, SUSE Linux Enterprise Desktop 12, Solaris 10 U4, Solaris 10 U5, SuSE Linux 10, SuSE Linux 10.2, SuSE Linux 10.3, SuSE Linux 11, SuSE Linux 11.1, SuSE Linux 11.2, SuSE Linux 12.0, SuSE Linux 12.3, SuSE Linux 9.3, TurboLinux 11.0, Ubuntu 10.04, Ubuntu 10.10, Ubuntu 11.04, Ubuntu 11.10, Ubuntu 12.04, Ubuntu 12.10, Ubuntu 13.04, Ubuntu 13.10, Ubuntu 14.04, Ubuntu 14.10, Ubuntu 15.04, Ubuntu 15.10, Ubuntu 16.04, Ubuntu 16.10, Ubuntu 17.10, Ubuntu 8.04, Ubuntu 8.04.1, Ubuntu 8.04.2, Ubuntu 8.10, Ubuntu 9.04, Ubuntu 9.10, Ubuntu Core, openSUSE 11.3, openSUSE 11.4, openSUSE 12.1, openSUSE 12.2, openSUSE 13.1, openSUSE 13.2, openSUSE 42.3, openSUSE Tumbleweed |
| | Other operating systems supported | | Android |
| Certification | CE, FCC | | |
| Operational conditions | | Operational conditions | |
| Operating temperature (T-T) | 0 - 40 °C | Operating temperature (T-T) | 0 - 40 °C |
| Storage temperature (T-T) | -20 - 85 °C | Storage temperature (T-T) | -20 - 85 °C |
| Weight & dimensions | | Weight & dimensions | |
| Weight | 31 g | Weight | 31 g |
| Width | 15 mm | Width | 15 mm |
| Depth | 45 mm | Depth | 45 mm |
| Height | 43 mm | Height | 43 mm |
| Packaging data | | Packaging data | |
| Quantity per pack | 1 pc(s) | Quantity per pack | 1 pc(s) |
| Package width | 25 mm | Package width | 25 mm |
| Package depth | 90 mm | Package depth | 90 mm |
| Package height | 180 mm | Package height | 180 mm |

Packaging data

| | |
|----------------|-------------|
| Package type | Hanging box |
| Package weight | 63 g |
| Manual | ✓ |

Technical details

| | |
|-------------------------|------|
| Compliance certificates | RoHS |
|-------------------------|------|

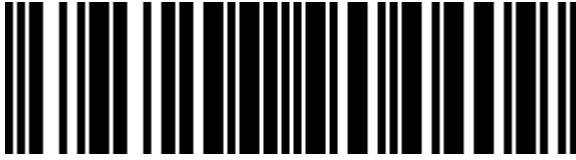

8595247904409

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 17-DEC-2024. Prints or copies of Information are only valid on the printed Publication date