

QNAP TS-216G võrkupääsu- ja varundusserver NAS Tower Cortex-A Cortex-A55 4 GB HDD Valge



Brand : QNAP


Product code: TS-216G

Product name : TS-216G

QNAP TS-216G. Tüüp: NAS. Keretüüp: Tower. Seadme klass: Suurettevõte. Protsessori perekond: Cortex-A, Protsessori mudel: Cortex-A55, Protsessori sagedus: 2 GHz. Sisemälu: 4 GB. Installeeritud ketaste tüüp: HDD

Storage		Ports & interfaces	
Storage drive interface *	Serial ATA	Ethernet LAN (RJ-45) ports *	2
Supported storage drive interfaces	Serial ATA	Concurrent connections	200
Storage drive size	2.5/3.5"	Design	
Storage drive sizes supported	2.5,3.5"	Chassis type *	Tower
Hot-swap drive bays	✓	Cooling type *	Active
Storage drives installed *	✓	Product colour	White
Number of storage drives installed *	2	Number of fans	1 fan(s)
Number of storage drives supported *	2	Fan diameter	7 cm
Installed storage drive type *	HDD	LED indicators	HDD, LAN, Status, USB
Supported storage drive types *	HDD & SSD	Built-in display	✓
Processor		Cable lock slot	✓
Processor manufacturer *	ARM	Cable lock slot type	Kensington
Processor family *	Cortex-A	Performance	
Processor model *	Cortex-A55	Type *	NAS
Processor frequency *	2 GHz	Device class *	Large Enterprise Business
Processor cores	4	Buzzer	✓
Processor architecture	ARM Cortex-A55	Reset button	✓
CPU configuration (max)	1	On/off switch	✓
On-board graphics card model	Arm Mali-G52	USB copy function	✓
Memory		Power	
Internal memory *	4 GB	Power supply location	Built-in
Maximum RAM supported	4 GB	Power supply unit (PSU) capacity	65 W
ECC	✗	Number of power supply units	1
Flash memory	4000 MB	Power consumption (typical)	13.907 W
Network		Power consumption (sleep)	4.973 W
Ethernet LAN *	✓	AC input voltage	100 - 240 V
Ethernet LAN data rates	10,100,1000,2500 Mbit/s	Weight & dimensions	
Jumbo frames support	✓	Width *	102 mm
Wake-on-LAN ready	✓	Depth *	220.6 mm
WLAN adapter supported	✓	Height *	165 mm
Ports & interfaces		Weight	1.45 kg
USB port *	✓	Package weight	2.41 kg
USB 2.0 ports quantity	2		

Ports & interfaces		Operational conditions	
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	1	Operating temperature (T-T)	0 - 40 °C
		Operating relative humidity (H-H)	5 - 95%
		Storage temperature (T-T)	-20 - 70 °C
		Other features	
		Warranty period	2 year(s)

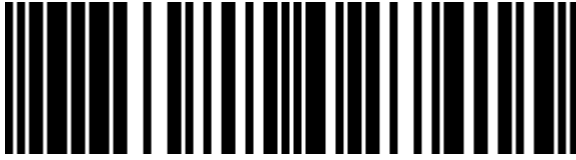

0885022027415



885022027415



4711103085066

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.