tp-link

TP-Link Tapo TC40 Ülepea IP süsteemiga turvakaamera
Hoonesisene & hooneväline 1920 x 1080 pikslit Lagi/sein/post

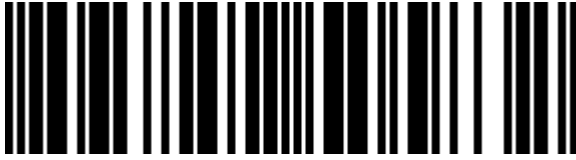**Brand :** TP-Link   **Product family:** Tapo   **Product code:** TAPO TC40
Product name : TC40

TP-Link Tapo TC40. Tüüp: IP süsteemiga turvakaamera, Toetatud paigutus: Hoonesisene & hooneväline, Ühenduvustehnoloogia: Juhtmevaba. Kinnituse tüüp: Lagi/sein/post, Toote värv: Valge, Toote kuju: Ülepea. Rotatsiooni nurk: 360°. Optilise sensori suurus: 25,4 / 3 mm (1 / 3"). Öönägemise kaugus: 30 m, LED-i tüüp: IR, Infrapuna lainepikkus: 850 nm

Performance

Type *	IP security camera
Placement supported *	Indoor & outdoor
Connectivity technology *	Wireless
PTZ control	✔
Auto-tracking	✔
Auto patrol mode	✔
Virtual assistant	Amazon Alexa & Google Assistant
Antenna type	Internal
Certification	CE, FCC, RoHS, RCM

Design

Form factor *	Dome
Mounting type *	Ceiling/Wall/Pole
Product colour *	White
LED indicators	System
International Protection (IP) code	IP65
Weatherproof	✔

Camera

Camera pan control	✔
Camera tilt control	✔
Angle of rotation	360°

Image sensor

Optical sensor size	25.4 / 3 mm (1 / 3")

Lens system

Number of lenses *	1

Night vision

Night vision *	✔
Night vision distance	30 m
LED type	IR
Infra-red wavelength	850 nm

Video

Maximum resolution *	1920 x 1080 pixels
Total megapixels *	2 MP
Video compression formats	H.264
Supported video modes	1080p
Video recording	✔
Frame rate	15 fps

Network

Wi-Fi *	✔
Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)
Bluetooth *	✗

Storage

Built-in HDD *	✗
Card reader integrated	✔
Compatible memory cards	MicroSD (TransFlash)
Maximum memory card size	512 GB

Security

Video motion detection	✔
Active tampering alarm	✔
Security algorithms	128-bit AES, SSL/TLS, WPA, WPA2-PSK
Intelligent Video Surveillance (IVS) system features	Human detection

Management features

Reset button	✔

Power

Power source type *	AC
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Power consumption (typical)	2.21 W
Power consumption (max)	8.78 W
DC output voltage	12
DC output current	1 A

Operational conditions

Operating temperature (T-T)	-30 - 60 °C
Storage temperature (T-T)	-40 - 60 °C
Operating relative humidity (H-H)	10 - 90%
Storage relative humidity (H-H)	5 - 90%

Weight & dimensions

Width	123.8 mm
Depth	123 mm
Height	90 mm

Video

Privacy masking	✔

Audio

Built-in speaker(s)	✔
Audio system	2-way
Built-in microphone	✔

Network

Ethernet LAN *	✘
Supported network protocols	TCP/IP, ICMP, DNS, HTTPS, TCP, UDP

Sustainability

Compliance certificates	CE, Federal Communications Commission (FCC), RoHS

Packaging content

Number of cameras *	1
Mounting kit	✔
Screws included	✔
Anchors included	✔
Packaging content	Tapo C500 Camera DC Power Adapter Anchors and Screws Mounting Template Waterproof Seal Quick Start Guide

4895252505832