



LG 37BH7N-H Digital signage lameekraan 94 cm (37") LCD WiFi 700 cd/m² Full HD Must WebOS 24/7

Brand : LG

Product code: 37BH7N-H.AEU




Product name : 37BH7N-H

LG 37BH7N-H. Tootedisain: Digital signage lameekraan. Ekraani diagonaal: 94 cm (37"), Ekraani tehnoloogia: LCD, Ekraani resolutsioon: 1920 x 540 pikslit, Ekraani heledus: 700 cd/m², HD tüüp: Full HD. WiFi. Töötunnid (tunnid/päevad): 24/7. Installitud operatsioonisüsteem: WebOS. Toote värv: Must



Display		Design	
Panel type	IPS	Orientation	Horizontal/Vertical
LED backlight	✓	Product colour *	Black
LED backlighting type	Edge-LED	VESA mounting *	✓
Display diagonal *	94 cm (37")	Panel mounting interface	400 x 200 mm
Display technology *	LCD	Bezel width (bottom)	1.56 cm
Display resolution *	1920 x 540 pixels	Bezel width (side)	9.3 mm
Display brightness *	700 cd/m ²	Bezel width (top)	1.56 cm
HD type *	Full HD	Performance	
Touchscreen *	✗	Purpose *	Retail
Native aspect ratio	32:9	On Screen Display (OSD)	✓
Response time	14 ms	Operating hours (hours/days)	24/7
Contrast ratio (typical)	1000:1	HDCP	✓
Contrast ratio (dynamic)	1000000:1	Automatic brightness control	✓
Viewing angle, horizontal	178°	HDCP version	1.4/2.2
Viewing angle, vertical	178°	Power	
Display number of colours	16.7 million colours	Power consumption (typical) *	40 W
Panel life	50000 h	Power consumption (standby) *	0.5 W
Native refresh rate	60 Hz	Power consumption (max)	50 W
Haze rate	25%	AC input voltage	100-240 V
Colour gamut	72%	AC input frequency	50-60 Hz
Ports & interfaces		Computer system	
HDMI ports quantity *	3	Internal memory	16 GB
HDMI input ports quantity	2	Operating system installed	WebOS
HDMI output ports quantity	1	Operating system version	6.0
DVI port *	✗	Weight & dimensions	
DisplayPorts quantity *	1	Display width	922.3 mm
USB port *	✓	Display depth	43.5 mm
USB ports quantity	1	Display height	288.3 mm
USB version	2.0	Display weight	7 kg
USB connector type	USB Type-A	Packaging content	
Ethernet LAN *	✓	Remote control included	✓
Ethernet LAN (RJ-45) ports	1	Cables included	AC, Phone
Wi-Fi *	✓		
RS-232C	✓		

Ports & interfaces		Operational conditions	
Remote (IR) input	1	Operating temperature (T-T)	0 - 40 °C
Audio		Operating relative humidity (H-H)	10 - 80%
Built-in speaker(s) *	×	Technical details	
Design		Real Time Clock (RTC)	✓
Product design *	Digital signage flat panel	Other features	
Placement supported *	Indoor	Audio output	1
		Plug and Play	✓

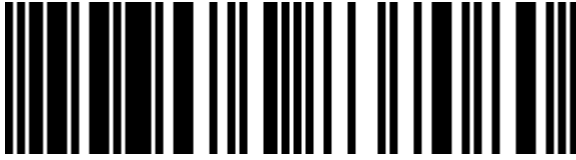

8806084837080

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.