AXAGON

Axagon HMC-12GM2 sülearvuti dokk ja pordireplikaator Juhtmega ühendatud USB 3.2 Gen 2 (3.1 Gen 2) Type-C Hall

Brand : Axagon   **Product code:** HMC-12GM2
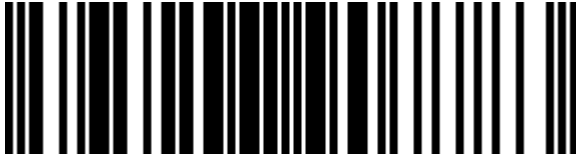
Product name : HMC-12GM2

Axagon HMC-12GM2. Ühenduvustehnoloogia: Juhtmega ühendatud, Hostiliides: USB 3.2 Gen 2 (3.1 Gen 2) Type-C, USB Power Delivery kuni: 100 W. Ethernet LAN-i andmeedastuskiirused: 10,100,1000 Mbit/s, Võrgustandardid: IEEE 802.1Q, IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x. Toote värv: Hall, Ühilduvad mälukaardid: MMC, MMC Mobile, MicroSD (TransFlash), MicroSDHC, MicroSDXC, MiniSD, MiniSDHC, RS-MMC, SD, SDHC,..., Toetatud ketaste tüübid: SSD. Ventilaatorite arv: 1 ventilaator(id). Toiteallika tüüp: USB, Toitepistmik: USB tüüp-C, USB-kaabli pikkus: 0,5 m

Ports & interfaces

Connectivity technology *	Wired
Host interface *	USB 3.2 Gen 2 (3.1 Gen 2) Type-C
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity *	2
USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity	1
USB 3.2 Gen 2 (3.1 Gen 2) Type-C ports quantity	2
USB Power Delivery (USB PD)	✔
USB Power Delivery revision	3.0
USB Power Delivery up to	100 W
HDMI ports quantity *	1
DisplayPorts quantity	1
Combo headphone/mic port	✔
Headphone outputs *	1
Headphone connectivity	3.5 mm
DC-in jack	✘
HDCP	✔
HDCP version	1.4/2.3
USB Type-C DisplayPort Alternate Mode	✔

Network

Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Ethernet LAN data rates	10,100,1000 Mbit/s
Wake-on-LAN ready	✔
Networking standards	IEEE 802.1Q, IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x

Performance

Hot-Plug support	✔
Product colour *	Grey
Hub interfaces	3.5mm, DisplayPort, HDMI, RJ-45, USB 3.1 (3.1 Gen 1) Type-A, USB 3.2 Gen 1 (3.1 Gen 1) Type-C, USB 3.2 Gen 2 (3.1 Gen 2) Type-A
LED indicators	✔
Plug and Play	✔
Charging function	✔
Housing material	Aluminium
Country of origin	China
Brand compatibility	Universal
Certification	CE

Audio

Built-in speaker(s)	✘
Built-in microphone	✘

Cooling

Built-in fan	✔
Number of fans	1 fan(s)

Power

Power source type	USB
Power connector	USB Type-C
USB cable length	0.5 m

Software

Windows operating systems supported	✔
Mac operating systems supported	✔

Network

Jumbo frames support	✔
Auto MDI/MDI-X	✔
Full duplex	✔

Performance

Card reader integrated *	✔
Compatible memory cards	MMC, MMC Mobile, MicroSD (TransFlash), MicroSDHC, MicroSDXC, MiniSD, MiniSDHC, RS-MMC, SD, SDHC, SDXC
Number of storage drives supported	1
Supported storage drive types	SSD
Storage drive sizes supported	M.2
SSD interface	M.2
NVMe	✔
Supported SSD sizes	M.2
SSD enclosure	✔
Data transfer rate	10 Gbit/s
HD type	4K Ultra HD
Maximum digital resolution	4096 x 2160 pixels
Number of displays supported	2
Maximum refresh rate	240 Hz

Software

Linux operating systems supported	✔
Server operating systems supported	✔
Mobile operating systems supported	✔
Other operating systems supported	✔

Weight & dimensions

Width	65 mm
Depth	149 mm
Height	17 mm
Weight	178 g

Packaging data

Quantity per pack	1 pc(s)
Package width	213 mm
Package depth	130 mm
Package height	26 mm
Package weight	342 g

Packaging content

Cables included	USB Type-C to USB Type-C
Manual	✔

Technical details

Compliance certificates	RoHS

8595247907783