



D-Link DWP-1010/KT wi-fi-võrgu süsteem Kaks sagedusala (2,4 GHz / 5 GHz) Wi-Fi 6 (802.11ax) Valge 2 5G Sisemodem

Brand : D-Link

Product code: DWP-1010/KT


Product name : DWP-1010/KT

D-Link DWP-1010/KT. Toote värv: Valge, Antenni tüüp: Sisemodem, Toote tüüp: Võrgusüsteem. Wi-Fi laineala: Kaks sagedusala (2,4 GHz / 5 GHz), Wi-Fi standard: Wi-Fi 6 (802.11ax), WLAN edastuskiirus (max): 600 Mbit/s. Modem chipset: Qualcomm SDX62, Mobiilsidevõrgu põlvkond: 5G, 4G-standardid: LTE. Tulemüür: DoS, Stateful Packet Inspection, Anti-spoofing Checking, IP/MAC Address Filtering, 1 x DMZ, Rahvusvahelise kaitse (IP) kood: IP67. Võimsustarve (tüüpiline): 12 W, Ülepingekaitse: 6 kV



Design		Features	
Product type	Mesh system	International Protection (IP) code	IP67
Product colour *	White	Ports & interfaces	
LED indicators	Power, Status	Ethernet LAN (RJ-45) ports *	2
Antenna type *	Internal	Power over Ethernet (PoE)	✓
Reset button	✓	Ethernet WAN	✓
Wireless LAN features		DC-in jack	✓
Wi-Fi band *	Dual-band (2.4 GHz / 5 GHz)	Power	
Top Wi-Fi standard *	Wi-Fi 6 (802.11ax)	Power consumption (typical)	12 W
WLAN data transfer rate (max) *	600 Mbit/s	Power protection features	Surge protection
Networking standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.3at, IEEE 802.3i, IEEE 802.3u	Surge protection voltage	6 kV
	WPA-Personal, WPA2-Personal, WPA3, WPA3-Personal	Certificates	
Security algorithms	✓	Compliance certificates	CE, Federal Communications Commission (FCC)
Point-to-point protocol over Ethernet (PPPoE)	✓	Operational conditions	
Dynamic IP	✓	Operating temperature (T-T)	-30 - 50 °C
Static IP	✓	Storage temperature (T-T)	-40 - 70 °C
Tagged VLAN	✓	Operating relative humidity (H-H)	10 - 95%
Mobile network		Weight & dimensions	
Modem chipset	Qualcomm SDX62	Indoor unit width	9.2 cm
Mobile network generation	5G	Indoor unit depth	9.2 cm
4G standard	LTE	Indoor unit height	9.3 cm
5G standard	NR, Sub6	Indoor unit weight	200 g
SIM card type	MicroSIM	Outdoor unit width	14.5 cm
Features		Outdoor unit depth	10.5 cm
WPS push button	✓	Outdoor unit height	21 cm
		Outdoor unit weight	760 g

Features		Packaging content	
Quality of Service (QoS) support	✓	Number of products included	2 pc(s)
Firewall security	DoS, Stateful Packet Inspection, Anti-spoofing Checking, IP/MAC Address Filtering, 1 x DMZ		
MU-MIMO technology	✓		

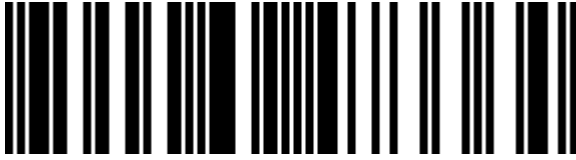

0790069473364



790069473364

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 10-FEB-2025. Prints or copies of Information are only valid on the printed Publication date