



APC Back-UPS Pro puhvertoiteallikas (UPS) Liini-interaktiivne 1,5 kVA 865 W 10 vahelduvvoolu kontakt

Brand : APC

Product code: BR1500GI


Product name : Back-UPS Pro

APC Back-UPS Pro. Puhvertoiteallika topoloogia: Liini-interaktiivne, Väljundvõimsuse potentsiaal: 1,5 kVA, Väljundvõimsus: 865 W. AC-väljundi tüüp: C13 pistikut, Elektripistik: C14 pistikut, AC-väljundite arv: 10 vahelduvvoolu kontakt. Akutehnoloogia: Suletud pliiaku (VRLA), Aku vastupidavus: 187 VAh, Tüübipärane varundamisaeg täiskoormusega: 3,7 min. Toote värv: Must, Kuvamise tüüp: LCD. Vastavussertifikaadid: RoHS, Sertifikaat: A-tick, C-tick, CE, GOST, GS Mark, Telepermit, TUV, REACH, PEP, EOLI, NEMKO-GS



Features		Design	
UPS topology *	Line-Interactive	Product colour *	Black
Output power capacity *	1.5 kVA	Display type	LCD
Output power *	865 W	Operational conditions	
Waveform *	Sine	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (min) *	156 V	Storage temperature (T-T)	-15 - 40 °C
Input operation voltage (max) *	300 V	Operating relative humidity (H-H)	0 - 95%
Input frequency *	50/60 Hz	Storage relative humidity (H-H)	0 - 95%
Output frequency regulation	50/60 Hz	Operating altitude	0 - 9000 m
Automatic Voltage Regulation (AVR)	✓	Non-operating altitude	0 - 15000 m
Surge energy rating	441 J	Certificates	
Hold time (min)	10 ms	Compliance certificates	RoHS
Hold time (max)	12 ms	Certification	A-tick, C-tick, CE, GOST, GS Mark, Telepermit, TUV, REACH, PEP, EOLI, NEMKO-GS
Efficiency	98.9%	Packaging content	
Crest factor	3:1	Cables included	Phone (RJ-11), USB cable
Noise level	45 dB	Manual	✓
Surge protection	✓	Sustainability	
Surge protection features	Digital Subscriber Line (DSL), Fax, Modem, Network, Telephone	Sustainability certificates	ENERGY STAR
Audible alarm(s)	✓	Weight & dimensions	
Audible alarm modes	Low battery alarm, Overload alarm	Width	112 mm
Ports & interfaces		Depth	380 mm
AC outlet types	C13 coupler		
Power plug	C14 coupler		

Ports & interfaces		Weight & dimensions	
AC outlets quantity	10 AC outlet(s)	Height	301 mm
Number of output IEC jumpers	2	Weight	12.7 kg
USB port	✓	Packaging data	
Battery		Warranty card	✓
Battery technology	Sealed Lead Acid (VRLA)	Software CD	✓
Battery capacity	187 VAh	Bundled software	PowerChute Personal Edition
Typical backup time at full load	3.7 min	Package width	238 mm
Typical backup time at half load	12.4 min	Package depth	488 mm
Battery life (max)	5 year(s)	Package height	387 mm
Battery recharge time	8 h	Package weight	14.3 kg
Hot-swap battery	✓	Logistics data	
Automatic battery test	✓	Products per pallet	20 pc(s)
Cold start	✓	Harmonized System (HS) code	85078000
Replacement battery cartridge	APCRBC124	Products per master (outer) case	1 pc(s)
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	1x Detachable IEC Power Cord

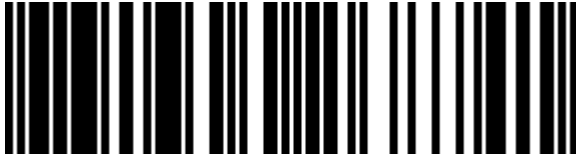

0731304268741



731304268741



9789800326725



5715063468418

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.