



APC BR1300MI puhvertoiteallikas (UPS) Liini-interaktiivne 1,3 kVA 780 W 8 vahelduvvoolu kontakt

Brand : APC

Product code: BR1300MI


Product name : BR1300MI

APC BR1300MI. Puhvertoiteallika topoloogia: Liini-interaktiivne, Väljundvõimsuse potentsiaal: 1,3 kVA, Väljundvõimsus: 780 W. AC-väljundi tüüp: C13 pistikut, Elektripistik: C14 pistikut, AC-väljundite arv: 8 vahelduvvoolu kontakt. Akutehnoloogia: Suletud pliiaku (VRLA), Aku kasutusiga (max): 5 aasta(t), Aku laadimisaeg: 16 h. Toote kuju: Tower, Toote värv: Must, Kaabli pikkus: 1,83 m. Sertifikaat: A-tick, C-tick, CE, EAC, GS Mark, RCM, TISI



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Tower
Output power capacity *	1.3 kVA	Cable length	1.83 m
Output power *	780 W	Cooling type	Passive
Waveform *	Sine	Product colour *	Black
Input operation voltage (min) *	176 V	Display type	LCD
Input operation voltage (max) *	294 V	LED indicators	✓
Input frequency *	50/60 Hz	Operational conditions	
Output frequency	50/60 Hz	Operating temperature (T-T)	0 - 40 °C
Automatic Voltage Regulation (AVR)	✓	Storage temperature (T-T)	-15 - 45 °C
Maximum current	10 A	Operating relative humidity (H-H)	0 - 95%
Surge energy rating	509 J	Storage relative humidity (H-H)	0 - 95%
ECO mode	✓	Operating altitude	0 - 3000 m
Noise level	45 dB	Non-operating altitude	0 - 15000 m
Surge protection	✓	Certificates	
Surge protection features	Network	Certification	A-tick, C-tick, CE, EAC, GS Mark, RCM, TISI
Audible alarm(s)	✓	Packaging content	
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	Cables included	USB cable
Ports & interfaces		Manual	✓
AC outlet types	C13 coupler	Sustainability	
Power plug	C14 coupler	Sustainability certificates	Green Premium
AC outlets quantity	8 AC outlet(s)		
USB port	✓		

Ports & interfaces		Weight & dimensions	
USB 2.0 ports quantity	1	Width	250 mm
Ethernet LAN (RJ-45) ports	2	Depth	382 mm
Cabling technology	10/100/1000Base-T(X)	Height	100 mm
Battery		Weight	10.2 kg
Battery technology	Sealed Lead Acid (VRLA)	Packaging data	
Battery life (max)	5 year(s)	Package width	485 mm
Battery recharge time	16 h	Package depth	225 mm
Hot-swap battery	✓	Package height	330 mm
Automatic battery test	✓	Package weight	11.8 kg
Cold start	✓	Logistics data	
		Harmonized System (HS) code	85078000
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V

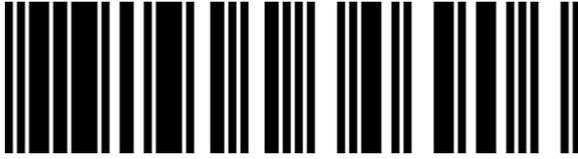

0731304346906



731304346906

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.