



**APC BX1600MI puhvertoiteallikas (UPS) Liini-interaktiivne 1,6 kVA
900 W 6 vahelduvvoolu kontakt**

Brand : APC

Product code: BX1600MI

Product name : BX1600MI



APC BX1600MI. Puhvertoiteallika topoloogia: Liini-interaktiivne, Väljundvõimsuse potentsiaal: 1,6 kVA, Väljundvõimsus: 900 W. AC-väljundi tüüp: C13 pistikut, Elektripistik: C13 pistikut, AC-väljundite arv: 6 vahelduvvoolu kontakt. Akutehnoloogia: Suletud pliiaku (VRLA), Aku mahutavus: 7 Ah, Aku ping: 24 V. Toote kuju: Kompaktne, Toote värv: Must, Kaabli pikkus: 1,2 m. Vastavussertifikaadid: RoHS, Sertifikaat: CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2



Features

UPS topology *	Line-Interactive
Output power capacity *	1.6 kVA
Output power *	900 W
Waveform *	Sine
Input operation voltage (min) *	140 V
Input operation voltage (max) *	300 V
Input frequency *	50/60 Hz
Output operation voltage (min)	230 V
Output operation voltage (max)	230 V
Output frequency	50/60 Hz
Output frequency regulation	0.5 Hz
Output voltage regulation	10%
Automatic Voltage Regulation (AVR)	✓
Surge energy rating	273 J
Response time	6 ms
Input power factor	0.56
Noise level	40 dB
Audible alarm(s)	✓
Audible alarm modes	Low battery alarm

Ports & interfaces

AC outlet types	C13 coupler
Power plug	C13 coupler
AC outlets quantity	6 AC outlet(s)
USB port	✓
USB 2.0 ports quantity	1
USB port type	USB Type-B
Ethernet LAN (RJ-45) ports	2

Battery

Typical backup time at full load	1 min
Typical backup time at half load	6.5 min
Battery life (max)	2 year(s)
Battery recharge time	8 h

Design

Form factor *	Compact
Cable length	1.2 m
Built-in fan	✓
Product colour *	Black
LED indicators	✓
International Protection (IP) code	IP20

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 40 °C
Operating relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m

Certificates

Compliance certificates	RoHS
Certification	CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2


Packaging content

Cables included	Input power cable
Manual	✓

Weight & dimensions

Width	140 mm
Depth	390 mm

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Height	190 mm
Battery capacity	7 Ah	Weight	10.3 kg
Battery voltage	24 V	Packaging data	
		Package width	390 mm
		Package depth	140 mm
		Package height	190 mm
		Package weight	11.3 kg
		Logistics data	
		Harmonized System (HS) code	85078000

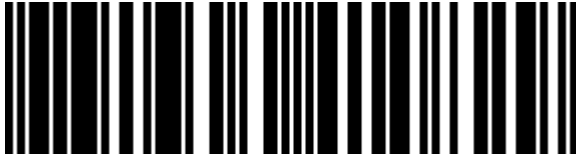

0731304410829



731304410829

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.