



APC BX1600MI-GR puhvertoiteallikas (UPS) Liini-interaktiivne 1,6 kVA 900 W 4 vahelduvvoolu kontakt

Brand : APC

Product code: BX1600MI-GR

Product name : BX1600MI-GR




APC BX1600MI-GR. Puhvertoiteallika topoloogia: Liini-interaktiivne, Väljundvõimsuse potentsiaal: 1,6 kVA, Väljundvõimsus: 900 W. AC-väljundi tüüp: Tüüp F, Elektripistik: Tüüp F, AC-väljundite arv: 4 vahelduvvoolu kontakt. Akutehnoloogia: Suletud pliiaku (VRLA), Tüübipärane varundamisaeg täiskoormusega: 1 min, Tüübipärane varundamisaeg poole koormusega: 6,5 min. Toote kuju: Kompaktne, Toote värv: Must, Kaabli pikkus: 1,2 m. Vastavussertifikaadid: RoHS, Sertifikaat: CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2



Features	
UPS topology *	Line-Interactive
Output power capacity *	1.6 kVA
Output power *	900 W
Waveform *	Sine
Input operation voltage (min) *	140 V
Input operation voltage (max) *	300 V
Input frequency *	50/60 Hz
Output operation voltage (min)	230 V
Output operation voltage (max)	230 V
Output frequency	50/60 Hz
Output frequency regulation	0.5 Hz
Output voltage regulation	10%
Automatic Voltage Regulation (AVR)	✓
Surge energy rating	273 J
Response time	6 ms
Input power factor	0.56
Noise level	40 dB
Surge protection	✓
Audible alarm(s)	✓
Audible alarm modes	Low battery alarm
Ports & interfaces	
AC outlet types	Type F
Power plug	Type F
AC outlets quantity	4 AC outlet(s)
USB port	✓
USB 2.0 ports quantity	1
USB port type	USB Type-B
Ethernet LAN (RJ-45) ports	2

Battery	
Typical backup time at half load	6.5 min
Battery life (max)	2 year(s)
Battery recharge time	8 h
Design	
Form factor *	Compact
Cable length	1.2 m
Built-in fan	✓
Product colour *	Black
LED indicators	✓
International Protection (IP) code	IP20
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 40 °C
Operating relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Certificates	
Compliance certificates	RoHS
Certification	CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2
Packaging content	
Cables included	Input power cable
Manual	✓
Weight & dimensions	
Width	140 mm
Depth	390 mm
Height	190 mm

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Weight	10.3 kg
Typical backup time at full load	1 min	Packaging data	
		Package width	235 mm
		Package depth	495 mm
		Package height	297 mm
		Package weight	11.3 kg
		Logistics data	
		Harmonized System (HS) code	85078000

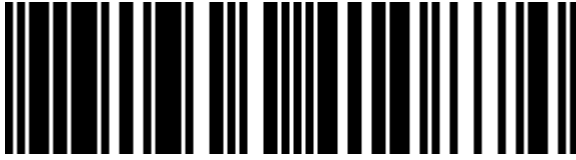

0731304410874



731304410874

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.