ZYXEL

Zyxel Nebula FWA710 juhtmevaba ruuter Multi-Gigabit Ethernet Kaks sagedusala (2,4 GHz / 5 GHz) 5G Valge

Brand : Zyxel   **Product code:** FWA-710-EU0102F
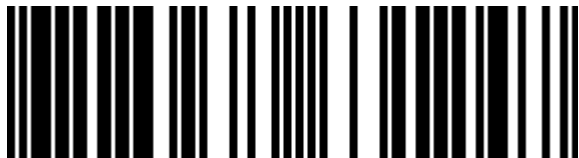
Product name : Nebula FWA710

Zyxel Nebula FWA710. WAN-ühenduse tüüp: SIM. Wi-Fi laineala: Kaks sagedusala (2,4 GHz / 5 GHz), Wi-Fi standard: Wi-Fi 4 (802.11n), WLAN edastuskiirus (max): 300 Mbit/s. Ethernet LAN-liidese tüüp: Multi-Gigabit Ethernet, Ethernet LAN-i andmeedastuskiirused: 10,100,1000,2500 Mbit/s. Mobiilsidevõrgu põlvkond: 5G, 4G-standardid: LTE-TDD & LTE-FDD, 5G standard: NR. Turvaalgoritmid: HTTPS

WAN connection			Design		
Ethernet WAN *	✗		On/off switch	✗	
DSL WAN *	✗		Built-in display	✗	
SIM card slot *	✔		Touchscreen	✗	
3G/4G USB modem compatibility *	✗		Product type *	Desktop/pole router	
WAN connection type	SIM		**Packaging content**		
Wireless LAN features			Cables included	LAN (RJ-45)	
Wi-Fi band *	Dual-band (2.4 GHz / 5 GHz)		AC adapter included	✗	
Top Wi-Fi standard *	Wi-Fi 4 (802.11n)		Antenna included	✔	
WLAN data transfer rate (max) *	300 Mbit/s		PoE injector included	✔	
Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)		Mounting kit	✔	
Network			Warranty card	✔	
Ethernet LAN *	✔		Manual	✔	
Ethernet LAN interface type *	Multi-Gigabit Ethernet		Quick installation guide	✔	
Ethernet LAN data rates	10,100,1000,2500 Mbit/s		Quick start guide	✔	
Mobile network			Packaging content	Standard 802.3af/at Power of Ethernet (PoE) injector 1.8 m Ethernet cable yellow 8P8C PG19 thread (cable gland) Quick start guide Warranty card DoC and safety warning Wall/pole mounting kit	
Mobile network generation	5G				
Dual SIM support	✗				
4G standard	LTE-TDD & LTE-FDD				
5G standard	NR		**Antenna**		
SIM card type	MicroSIM		Antenna design *	Internal	
Short Message Service (SMS)	✗		Antenna type	2x2	
Ports & interfaces			Antenna gain level (max)	9 dBi	
Ethernet LAN (RJ-45) ports *	1		Antenna direction type	Directional	
USB port *	✗		**Power**		
			Power source type *	PoE	

Management features	
Web-based management	✔
Reset button	✔

Security	
Security algorithms	HTTPS
Firewall	✔

Protocols	
DHCP server	✔

Design	
Product colour	White
Housing material	Aluminium, Metal, Polycarbonate (PC)
Wall mountable	✔
International Protection (IP) code	IP68
Indication light	✔
LED indicators	Status

Power	
Power consumption (typical)	15 W

Operational conditions	
Operating temperature (T-T)	-40 - 60 °C
Storage temperature (T-T)	-40 - 65 °C
Operating relative humidity (H-H)	5 - 95%
Storage relative humidity (H-H)	5 - 95%

Weight & dimensions	
Width	255 mm
Depth	256 mm
Height	58 mm
Weight	1.11 kg

Packaging data	
Package width	368 mm
Package depth	287 mm
Package height	111 mm
Package weight	2.52 kg

4718937631247